

Automatic Glycohemoglobin Analyzer

ADAMS A1c

HA-8190V



New Standard for HbA1c Testing

High speed

Fast mode measurement in 24 seconds and variant mode in just 58 seconds

User-friendly

Seamless transition between Fast and Variant modes shortens the overall TAT

Sophisticated

Separation and detection of variant hemoglobin are programmed as standard functions

Precise

Accurate measurement with CV less than 1%

Two modes with shorter TAT

- **Fast mode measures a sample in 24 seconds and variant mode*¹ in 58 seconds**

Measurement speed in Variant mode becomes now fast enough for routine testing.
 First screening of a patient is recommended in Variant Mode.
 Follow-up visits can now be performed more efficiently.*²

*1 Variant mode: Capable of detecting HbE and HbD by separating variant hemoglobins HbS and HbC.

*2 Need to operate with LIS.

Improved usability

- **Saves labor for aligning sample tubes**

Sample tubes rotate automatically for barcode reading, eliminating work flow to align the tubes.

- **Different racks for different purposes**

【Anemia rack】


By using anemia rack, sample is identified and measured as anemia sample without any special operation.
 This prevents error that indicates abnormally low hemoglobin value.

【Pair rack】

Hemolysis sample or small sample volume can be measured in a sample cup.
 Pair rack can have a barcode labeled-sample tube and a sample cup identified as a pair, contributing to safety aspects by preventing mix-up and streamlined work flow.



Identified as a set

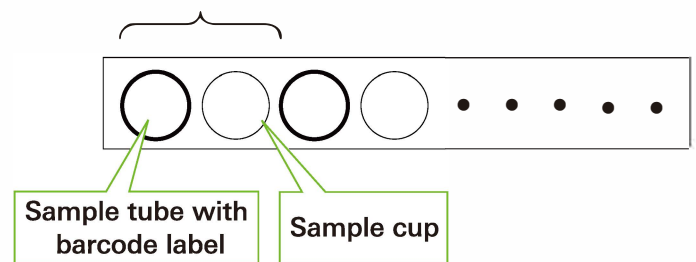

Specifications			
Samples	Whole blood or hemolysis sample	Number of samples loaded	One-way transportation : Maximum of 50 samples Loop transportation : Maximum of 100 samples
Measurement items	HbA1c (stable HbA1c), HbF (In Variant mode, HbS and HbC can be separated and HbE and HbD can be detected)	Display	Color LCD (with touch screen)
Measurement principle	Reverse-phase cation exchange chromatography	Built-in printer	Thermal printer with 58mm thermal paper
Measurement wavelengths	420nm/500nm (Dual-wavelength colorimetry)	Memory capacity	900 test results (including calibration results)
Resolution	0.1% Ratio. 1mmol/mol	External output	Serial 1 port (Can be optionally used as an Ethernet port)
Sample consumption	Approx. 8 μL (whole blood)	Measurement conditions	Temperature : 10 - 30°C Humidity : 20 - 80%RH (No condensation)
Processing speed	Fast mode : 24 seconds per sample Variant mode : 58 seconds per sample	Power consumption	300VA
Required sample volume	Sample tube : 10mm or above from the bottom of sample tube Sample cup : 400 μL or above	Dimensions	530(W)x530(D)x530(H)mm * Not including the projection portions, eluent packs and hemolysis washing solution bottle
Sample container	Sample tube : (φ 13 or 15) x (75 - 100mm) Sample cup : 500 μL or above	Weight	Analyzer : Approx. 41kg Sampler unit : Approx. 4kg

ARKRAY GLOBAL BUSINESS, INC.

Yousuien-nai, 59 Gansuin-cho,
 Kamigyo-ku, Kyoto 602-0008, JAPAN
 TEL 81-75-662-8979 FAX +81-75-431-1202